


可変側溝

グレーチング蓋 車道用,歩道用

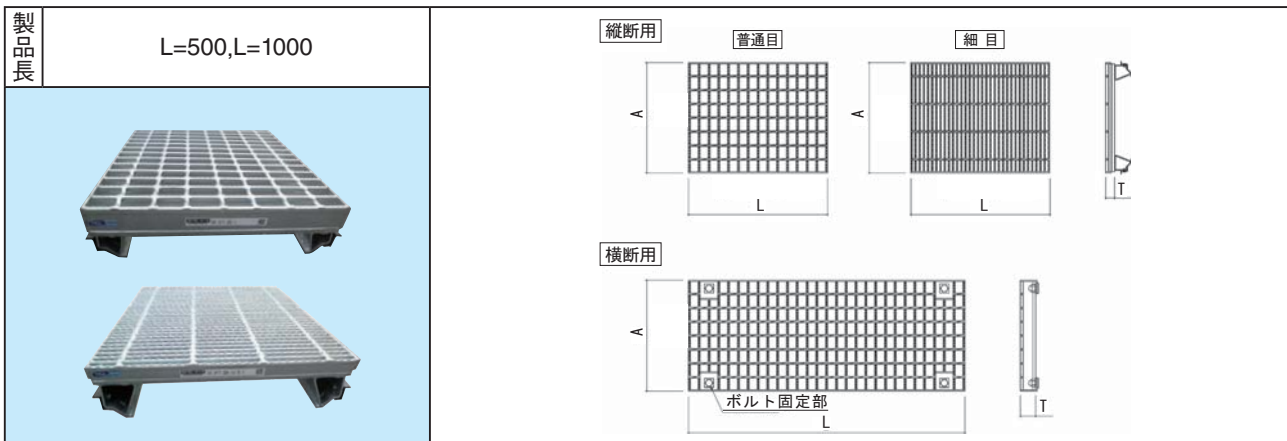

車道用(T-25)								
タイプ	呼び名	各部の寸法(mm)				参考質量(kg)		
		A	T (普通目)	T (細目)	L (普通目)	V (細目)	普通目	細目
縦断用 L=0.5m (滑り止め)	300	398	44	32	495	499	14.7	18.7
	400	498	50	38	501		21.4	25.3
	500	508	50				22.2	26.3
	600	608	60				29.3	34.0
	1100	1185					72.9	85.7
	1200	1285					79.8	93.8
	1300	1385	130				84.7	99.8
	1400	1485					91.7	107.8
	1500	1585					96.5	113.8
縦断用 L=1.0m (滑り止め)	300	398	44	32		995	995	28.6
	400	498	50	38	42.0			50.3
	500	508	50	38	43.5			52.2
	600	608	60	44	57.3			67.4
	1100	1185			125.8			157.9
	1200	1285			138.1			173.0
	1300	1385	130		146.0			183.7
	1400	1485			158.8			198.8
	1500	1585			166.2			209.4
横断用 L=0.5m (滑り止め)	300	400	55	44	495	495	18.4	25.2
	400	500	65	50			24.2	39.3
	500	600	75	50			33.1	45.1
	600	700	90	55			43.2	57.0
横断用 L=1.0m (滑り止め)	300	400	55	44	995	995	33.9	50.3
	400	500	65	50			47.1	78.6
	500	600	75	50			62.9	90.1
	600	700	90	55			84.3	114.0
	700	800					93.3	117.4
	800	900	130				107.8	130.2
	900	1000					125.4	151.1
	1000	1100	150				134.1	162.5

※横断用は、ボルト固定タイプが標準です。

歩道用(5kN/m ²)						
タイプ	呼び名	各部の寸法(mm)			参考質量(kg)	
		A	T	L		
L=0.5m 細目 (滑り止め)	300	398	19	493	13.1	
	400	498			16.0	
	500	508			16.7	
	600	608			18.9	
	*1100	1185		105	490	81.3
	*1200	1285				88.8
	*1300	1385				94.2
	*1400	1485				101.8
*1500	1585		107.2			
L=1.0m 細目 (滑り止め)	300	398	19	995	26.6	
	400	498			31.8	
	500	508			33.7	
	600	608			38.2	
	*1100	1185		105	990	147.3
	*1200	1285				161.2
	*1300	1385				170.6
	*1400	1485				184.5
*1500	1585		193.9			

※幅1100以上の歩道用はT-6

カルバート

道路・側溝

防護柵基礎

擁壁

補強土

地盤改良

消・融雪

その他