


CH-II可変側溝(中国地域限定)

CADデータ

標準品 T-25 縦断走行用 内幅300~600

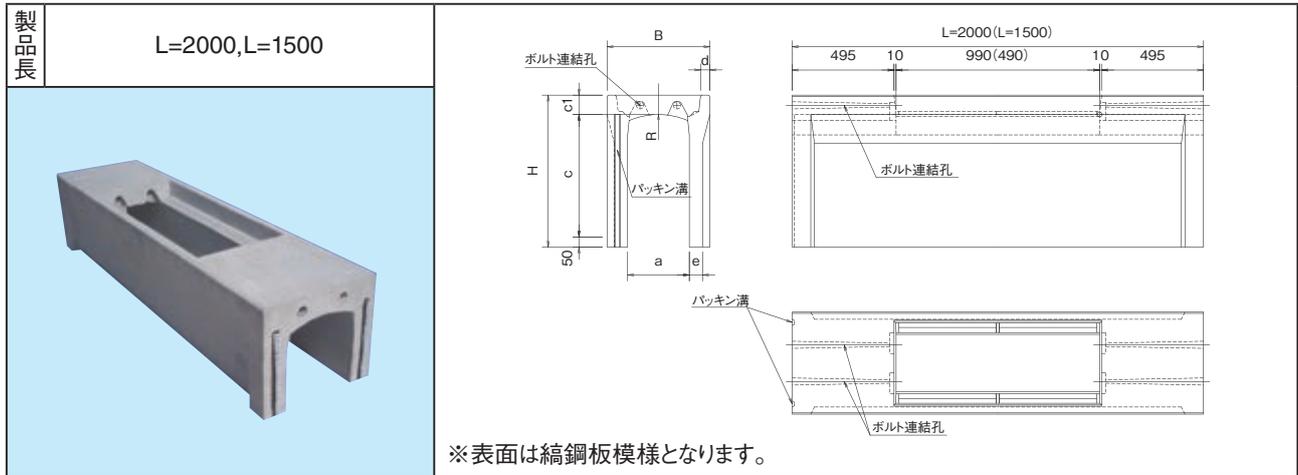

呼び名 (幅×高c)	各部の寸法(mm)						参考質量(kg)	
	B	H	c1	d	e	R	L=2000	L=1500
300	300	445					360	300
	400	545			55		415	340
	500	645					475	385
	600	745					575	460
	700	845	95	45	65	360	640	510
	800	945					710	565
400	900	1045					885	695
	1000	1145			80		965	755
	1100	1245					1045	815
	400	560					500	415
	500	660			60		560	460
	600	760					615	500
400	700	860					735	595
	800	960	110	50	70	470	810	650
	900	1060					880	705
	1000	1160					1070	845
	1100	1260			85		1155	915
	1200	1360					1245	975

呼び名 (幅×高c)	各部の寸法(mm)						参考質量(kg)	
	B	H	c1	d	e	R	L=2000	L=1500
500	400	575					560	510
	500	675			55		620	565
	600	775					720	615
	700	875			65		790	670
	800	975					860	725
	900	1075	125	55		600	1030	910
600	1000	1175			80		1115	980
	1100	1275					1195	1055
	1200	1375					1420	1120
	1300	1475			95		1520	1195
	1400	1575					1615	1270
	400	590					665	605
600	500	690			60		725	660
	600	790					790	715
	700	890					905	775
	800	990			70		980	835
	900	1090	140	60		730	1050	890
	1000	1190					1240	1095
600	1100	1290			85		1330	1170
	1200	1390					1420	1245
	1300	1490					1665	1320
	1400	1590			100		1760	1395
	1500	1690					1870	1485